BUCHER HYDRAULICS

High Pressure Internal Gear Pumps
Series QX

motion and progress

Classification: 410.10.50.00
Reference: 100-P-000021-E-06 / 05.05

Contents

1 General

1.1 Product description 3
1.2 Advantages 3

2 Technical data

2.1 General 3
2.2 Main characteristics for pressure range 1 4
2.3 Main characteristics for pressure range 2 5
2.4 Main characteristics for pressure range 3 5

3 Performance graphs

3.1 Noise level 6
3.2 Efficiency 6-7
3.3 Operation with variable-speed drives 8-9

4 Single pumps

4.1 Dimensions 10
4.2 Pressure range 1 11
4.3 Pressure range 2 11
4.4 Pressure range 3 11
4.5 Ordering code for single pumps 12
4.6 Standard configuration 12
4.7 Special features 12

5 Double pumps

5.1 Selection table 13
5.2 Dimensions 14-22
5.3 Ordering code for double pumps 23

6 Triple pumps

6.1 Selection table 24
6.2 Ordering code for triple pumps 25

7 Pressure-holding pumps

7.1 Generals 26
7.2 Technical data 26
7.3 Main characteristics 26
7.4 Caracteristic curves / Effciency 27
7.5 Single pumps 27
7.6 Pressure-holding pump compined also QX-pump 28

8 Fluid cleanliness 29

9 Note 29

10 Accessories

10.1 Bolt-on valves - SAE 3000 pattern 30
10.2 Pipe flanges - high pressure type for up to 420 bar - SAE 3000 pattern 30
10.3 Pipe flanges - low pressure type for up to 16 bar - SAE 3000 pattern 31

1 General

1.1 Product description

The QX pumps are the 5th generation of Bucher internal gear pumps, which have proven themselves in thirty years of service around the world. Numerous improvements have been made to the straightforward and robust design.

Advances in the manufacturing process have made it possible - without making higher demands on individual components - to build pumps that are considerably lighter and more compact.

A new tooth profile, conceived and optimised with the help of CAE, has yielded another significant reduction in noise levels. Large sealing areas result in higher efficiencies.

The internal gear ring is supported by a hydrodynamic/ hydrostatic lubricating film, which allows operation at low viscosities or low and high speeds. QX pumps are therefore suitable for use with variable-speed drives, where they can provide variable deliveries.

1.2 Advantages

- High pressures
- Low noise level
- Long service life
- Negligible flow- and pressure-pulsations
- Can be used with fire-resistant fluids (HFB, HFC and HFD = QXV), fuels, biodegradable and low-viscosity fluids
- Insensitive to contamination of the fluid

2 Technical data

2.1 General

Installation attitude		unrestricted
Mounting method (standard)		oval 2-hole flange to ISO 3019/1 (SAE): QX 3-6 oval 2-hole flange to ISO 3019/2 (metric) QX 2+8
Direction of rotation		right, alternatively left (but not reversible)
Pump drive method		in-line, through a flexible coupling
Volumetric efficiency η_v		better than 95%
Fluids		HLP mineral oils to DIN 51524, Part 2 HFC fluids to VDMA 24317 other fluids - contact Bucher Hydraulics
Minimum fluid cleanliness		NAS 1638, Class 9 or ISO 4406, code 20/18/15
Viscosity range		10 ... 300 mm^2/s (cSt) (for values outside this range, contact Bucher Hydraulics)
Fluid temperature range		HLP-mineral oils - 80°C max. HFC 50°C max.
Inlet pressure	maximum	1.5 bar absolute (without external drain connection)
	minimum	0.5 - 0.95 bar absolute (dependent on pump frame size and speed, see example in section 3.3.2, page 8)
Approach against pressure		maximum 20 bar (higher values, contact Bucher Hydraulics)

2.2 Main characteristics for pressure range 1

			Pressure range 1				
Effective displacement	Flow rate [1]	Maximum speed	Type	Mineral oil to DIN 51524	HFC to VDMA 24317	Torque [3]	Power requirement [4]
				Continuous/Max. interm. press. [2]			
cm^3/rev	l/min	rpm		bar	bar	Nm	kW
10,3 12,6 15,9	14,9 18,3 23,0	4500 4000 3600	QX21-010 QX21-012 QX21-016	160/210 125/160 100/125	130/180 100/135 80/100	26 25 25	4,0 3,8 3,9
20,0 25,3 31,2	29,0 36,7 45,2	3600 3250 3000	QX31-020 QX31-025 QX31-032	160/210 125/160 100/125	130/180 100/135 80/100	51 50 50	7,7 7,7 7,5
40,7 50,3 64,7	59,0 72,9 93,8	3000 2600 2300	QX41-040 QX41-050 QX41-063	160/210 125/160 100/125	130/180 100/135 80/100	104 100 103	15,7 15,2 15,6
78,6 101,1 127,3	114 146 184	2300 2100 1800[5]	QX51-080 QX51-100 QX51-125	160/210 125/160 100/125	130/180 100/135 80/100	200 201 203	30,4 30,5 30,8
160,5 202,1 249,7	232 293 362	1800[6] 1800[6] 1800[6]	QX61-160 QX61-200 QX61-250	160/210 125/160 100/125	130/180 100/135 80/100	409 402 397	62,0 61,0 60,4
326,0 402,6 498,5	472 583 722	1750[6] 1750[6] 1500[6]	QX81-315 QX81-400 QX81-500	160/210 125/160 100/125	130/180 100/135 80/100	830 801 793	126,0 121,6 120,5

2.2.1 Suction arrangements for pump types QX61 and QX81

Minimum inlet pressure is 0.85 bar absolute with viscosity 10... 300 mm^2/s

	Speed 1500 rpm Suction height		Speed 1800 rpm Suction height	
	up to 150 mm	over 150 mm	up to 150 mm	over 150 mm
QX61-160	I	I	I	II
QX61-200	I	I	I	II
QX61-250	I	II	II	II
QX81-315	I	II	II	II
QX81-400	II	II	II	-
QX81-500	II	II	-	-

I = standard pump with one suction port
II = model with two suction ports
All pump types coded II can be used without the second suction port up to 1200 rpm

2.3 Main characteristics for pressure range 2

			Pressure range 2				
Effective displacement	Flow rate [1]	Maximum speed	Type	Mineral oil to DIN 51524 / HFC to VDMA 24317 Continuous/Max. interm. press. [2]		Torque [3]	Power requirement [4]
cm^3/rev	l/min	rpm		bar	bar	Nm	kW
5,1	7,4		QX22-005			17	2,6
6,3	9,1	5000	QX22-006	210 / 250	180 / 210	21	3,2
8,0	11,5		QX22-008			27	4,0
10,0	14,5		QX32-010			34	5,1
12,6	18,3	4300	QX32-012	210 / 250	180 / 210	42	6,4
15,6	22,6		QX32-016			52	7,9
20,4	29,5		QX42-020			68	10,4
25,1	36,4	3600	QX42-025	210 / 250	180 / 210	84	12,7
32,4	46,8		QX42-032			108	16,5
39,3	56,9		QX52-040			132	19,9
50,6	73,2	3000	QX52-050	210 / 250	180 / 210	170	25,7
63,7	92,1		QX52-063			213	32,3
80,2	116	2500[7]	QX62-080			268	40,7
101,0	146	2300[7]	QX62-100	210 / 250	180 / 210	338	51,2
124,8	181	2000[7]	QX62-125			417	63,4
163,0	236	1800[7]	QX82-160			544	82,7
201,3	291	1750[7]	QX82-200	210 / 250	180 / 210	672	102,1
249,2	361	1500[7]	QX82-250			833	126,5

2.4 Main characteristics for pressure range 3

			Pressure range 3				
Effective displacement	Flow rate [1]	Maximum speed	Type	Mineral oil to DIN 51524 / HFC to VDMA 24317 Continuous/Max. interm. press. [2]		Torque [3]	Power requirement [4]
cm^3/rev	l/min	rpm		bar	bar	Nm	kW
5,1	7,4		QX23-005			26	4,0
6,3	9,1	5000	QX23-006	320 / 400	280 / 350	32	4,9
8,0	11,5		QX23-008			41	6,2
10,0	14,5		QX33-010			51	7,7
12,6	18,3	4300	QX33-012	320 / 400	280 / 350	64	9,7
15,6	22,6		QX33-016			80	12,1
20,4	29,5		QX43-020			104	15,8
25,1	36,4	3600	QX43-025	320 / 400	280 / 350	128	19,4
32,4	46,8		QX43-032			165	25,0
39,3	56,9		QX53-040			200	30,4
50,6	73,2	3000	QX53-050	320 / 400	280 / 350	258	39,1
63,7	92,1		QX53-063			321	49,3
80,2	116	2500[7]	QX63-080			409	62,0
101,0	146	2300[7]	QX63-100	320 / 400	280 / 350	514	78,1
124,8	181	2000[7]	QX63-125			636	96,5
163,0	236	1800[7]	QX83-160			830	126,0
201,3	291	1750[7]	QX83-200	320 / 400	280 / 350	1025	155,7
249,2	361	1500[7]	QX83-250			1270	192,7

The operating data are valid for hydraulic oils as well as fire-resistant and environmentally-friendly fluids with a viscosity of 42 mm^2/s

1) at speed n = 1450 rpm
2) maximum intermittent pressure for max. 20 sec. and not more than 10% of the duty cycle
3) theoretical value at the max. permitted continuous pressure for mineral oil
4) theoretical value at the max. permitted continuous pressure for mineral oil at n = 1450 rpm
5) for speeds higher than 1500 rpm, the minimum permissible inlet pressure is 0.95 bar absolute
6) max. speed only possible with second suction port, see section 2.2.1, page 4
7) for max. speed minimum permissible inlet pressure is 0.95 bar absolute, for speeds higher contact Bucher Hydraulics

3 Performance graphs

The performance graphs shown are valid for the specified pump models.
For other pump sizes, contact Bucher Hydraulics.

3.1 Noise level

measured to DIN 45635, Part 26, in Stuttgart University's low-echo noise measurement chamber;
measurement distance 1 m;
speed n = 1500 rpm
viscosity = 42 mm^2/s

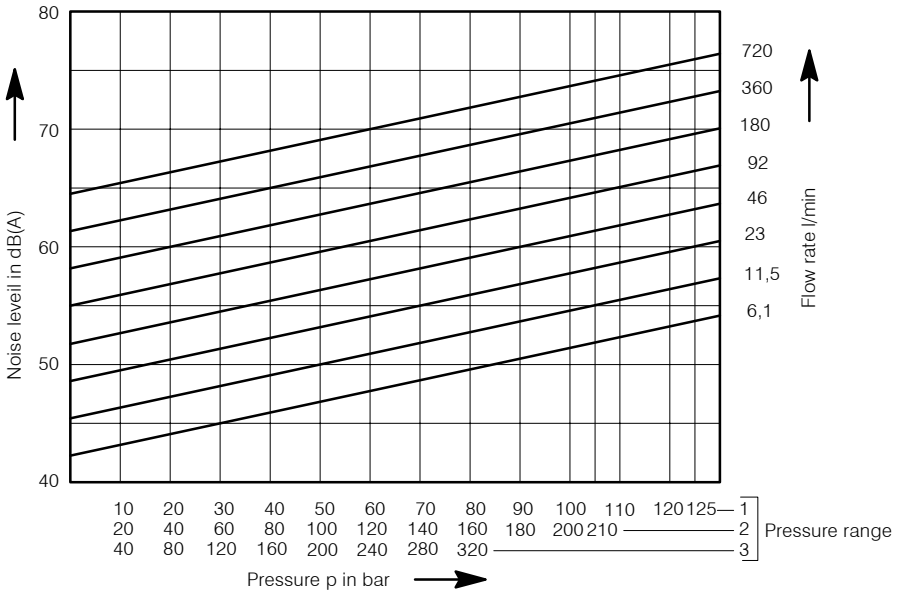

3.2 Efficiency

3.2.1 Pressure range 1

measured at speed 1450 rpm
viscosity 42 mm^2/s

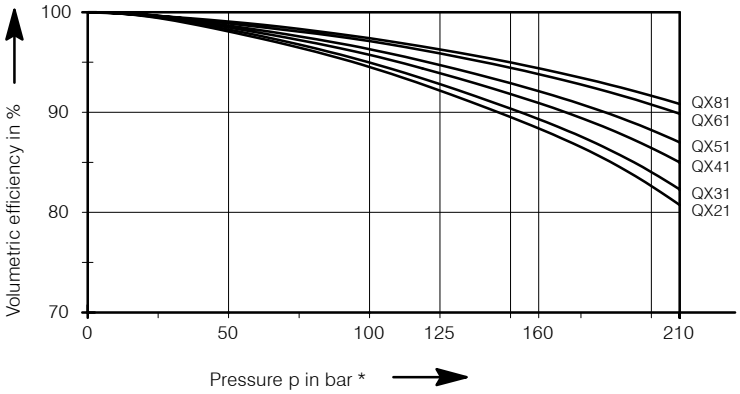

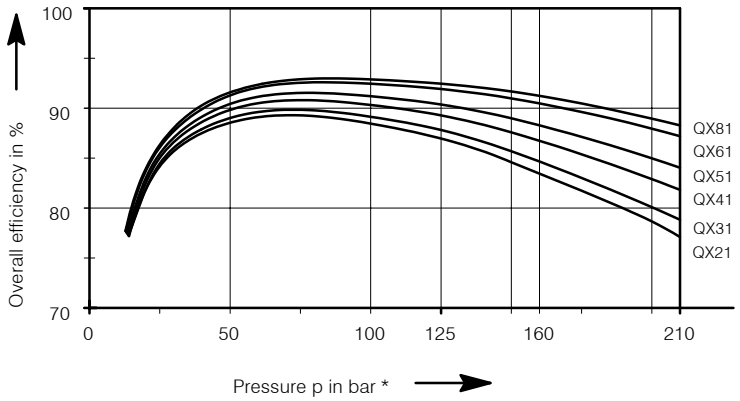

* Cont.-/Interm. pressure see page 4 (2.2)

3.2.2 Pressure range 2

measured at speed 1450 rpm
viscosity 42 mm^2/s
solid line = continuous pressure
dashed line = maximum intermittent pressure

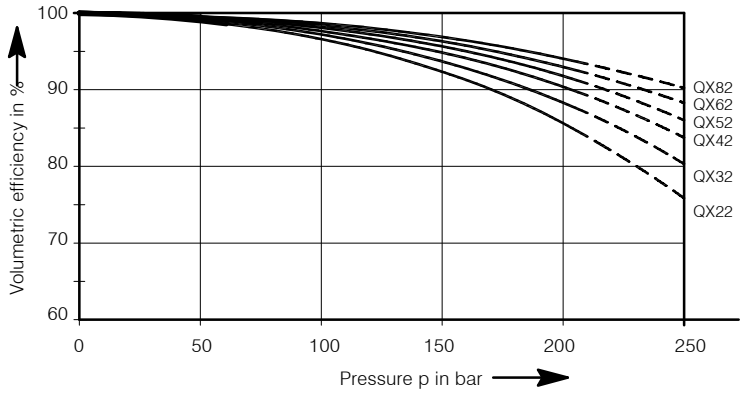

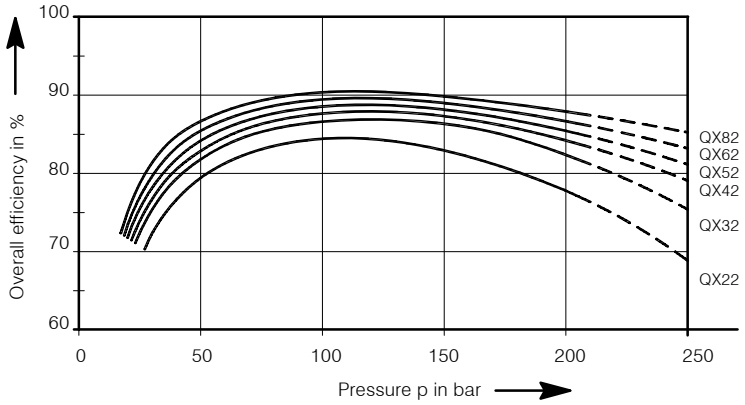

3.2.3 Pressure range 3

measured at speed 1450 rpm
viscosity 42 mm^2/s
solid line = continuous pressure
dashed line = maximum intermittent pressure

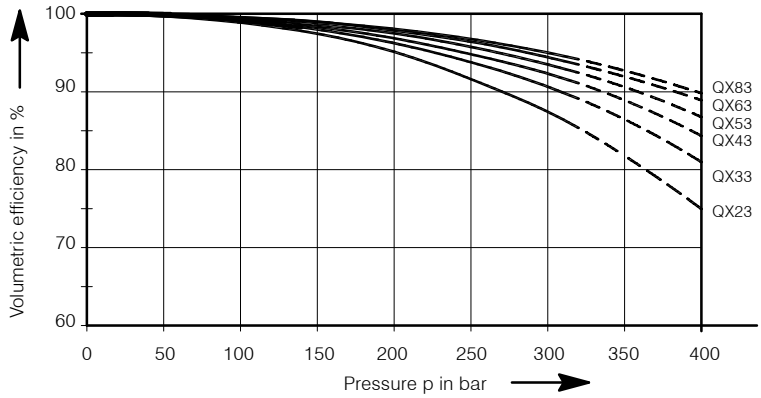

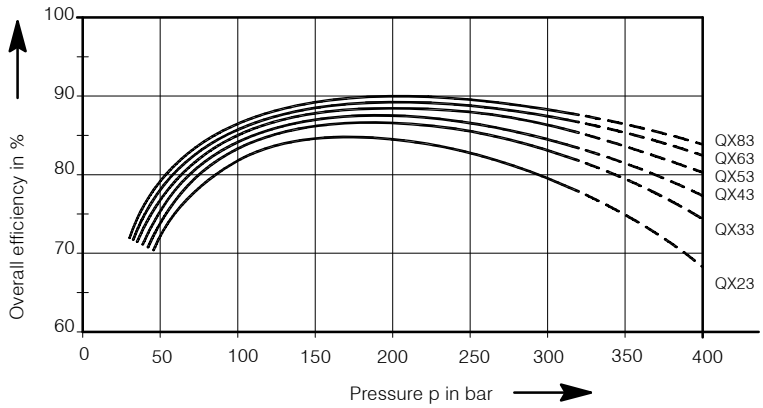

3.3 Operation with variable-speed drives

3.3.1 Minimum speed as a function of pressure

Pump QX52-063 measured:
with viscosity 42 mm²/s

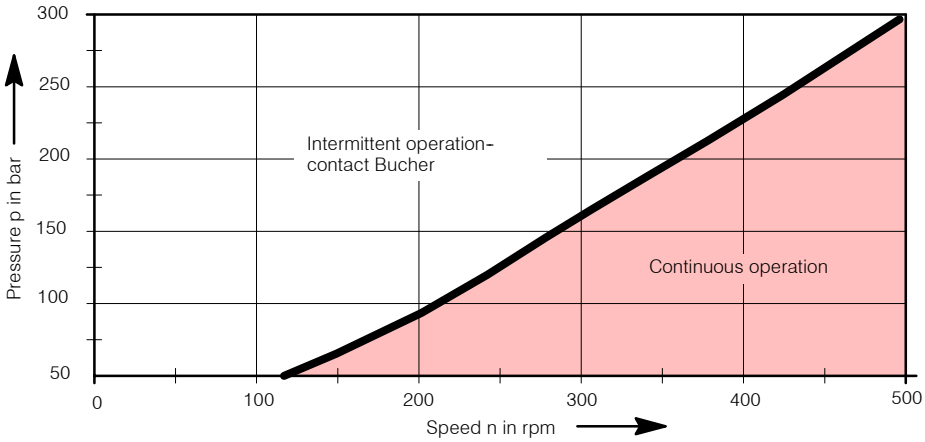

3.3.2 Minimum pressure at suction port as a function of speed

Pump QX52-063 measured:
with viscosity 42 mm²/s

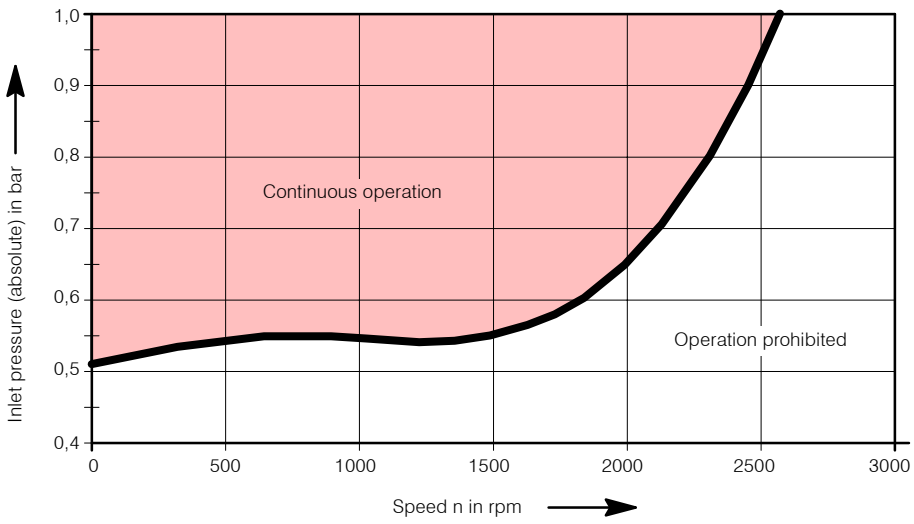

3.3.3 Typical loading cycle for a QX pump with variable-speed drive

Pump QX53-063 with separate drain connection
measured with: viscosity 20 mm^2/s

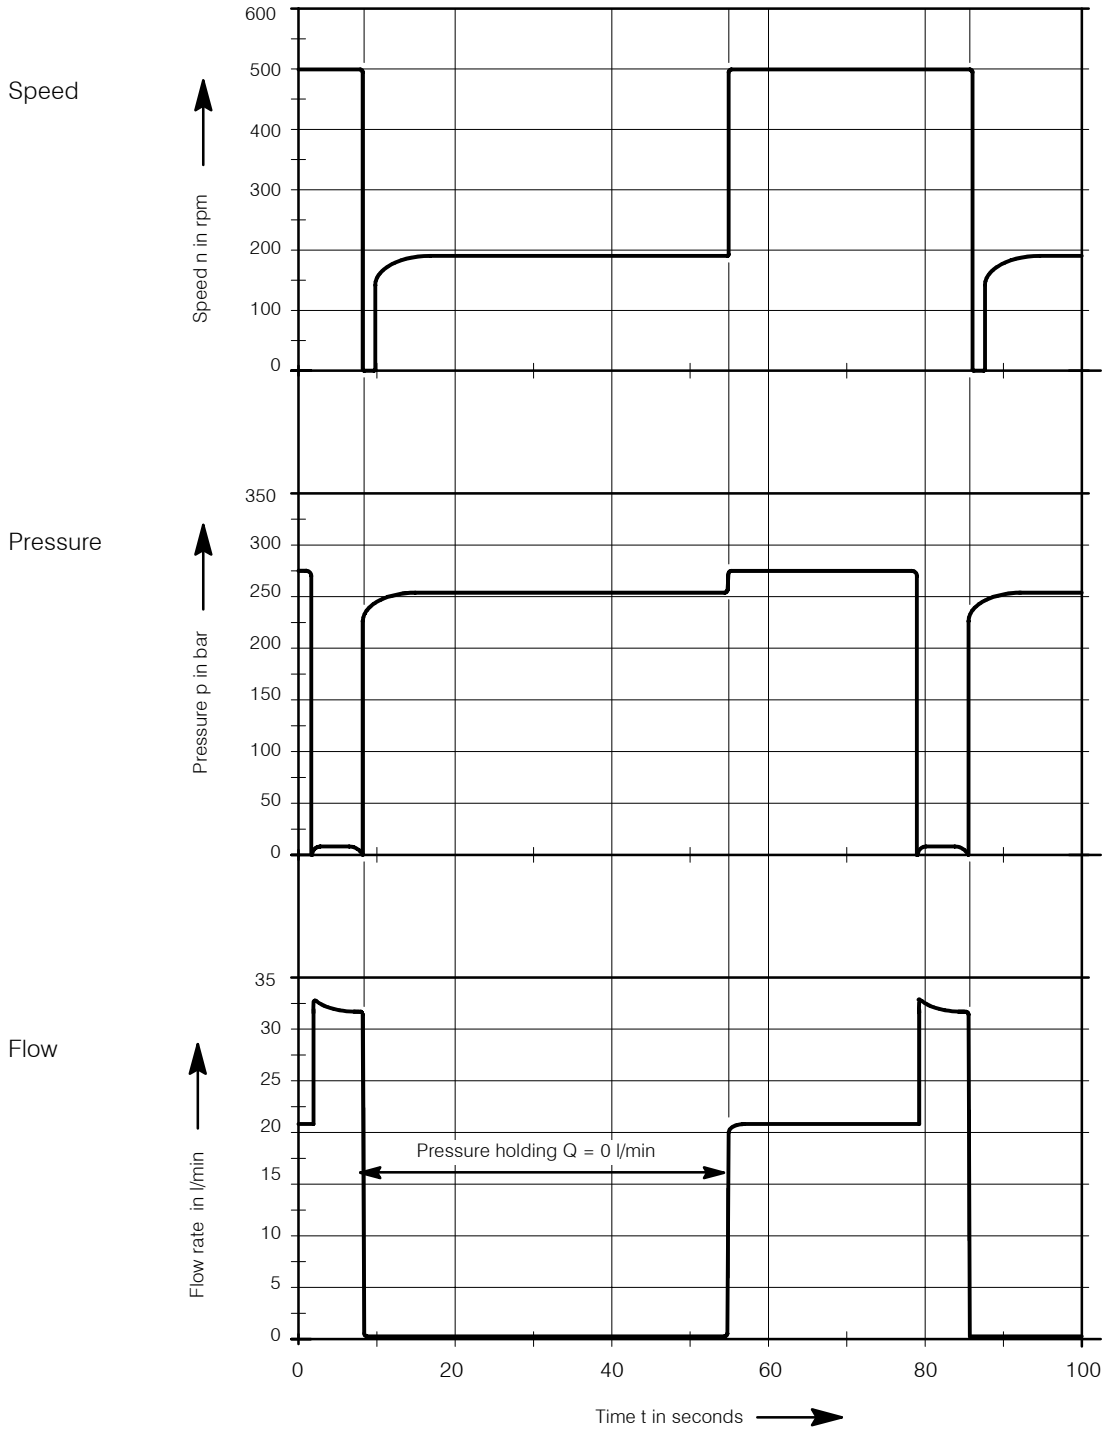

4 Single pumps

4.1 Dimensions

Frame size		2			3			4			5			6			8		
Pressure range		1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3
Suction port: to standard SAE J518 [8]	S	G1“ [10] thread			G1 1/4” [10] thread			1 1/2”			2”			2 1/2”			3”		
Pressure port: to standard SAE J518 [8]	P	G1/2” [10] [11] thread			G3/4” [10] [11] thread			1”			1 1/4”			1 1/2”			2”		
Mounting: oval 2-hole-flange to ISO 3019/1 (SAE) ISO 3019/2 (metric)	A	118			132			170			212			267			330		
	B (SAE)	-			106			146			181			229			-		
	B (Metr.)	100			109			140			180			224			280		
	C	9			11			14			18			22			26		
	N (SAE)	-			82,55 - 0,05			101,6 - 0,05			127 - 0,05			152,4 - 0,05			-		
	N (Metr.)	63 h8			80 h8			100 h8			125 h8			160 h8			200 h8		
	O	8,5			8,5			10,5			12,5			16,5			20		
	V	6			6			7			7			7			9		
4-hole flange ISO 3019/2	X (Metr.)	9			9			12			14			18			22		
	Y (Metr.)	85			103			125			160			200			250		
Shaft end: parallel, to ISO/R775 [9]	D	20 j6			25 j6			32 j6			40 j6			50 j6			63 j6		
	E	36			42			58			82			82			105		
	F	6			8			10			12			14			18		
	G	22,5			28			35			43			53,5			67		
	I	45			50			68			92			92			117		
Housing	K	37,5			44			52,5			60,5			74			90		
	L	136	118	153	164	144	189	202	176	232	242	210	280	288	248	338	361	331	446
	M	-	55	90	-	69,5	114	-	87	143	-	102	172	-	119	209	-	151	266
	T	85			107			133			177			214	220	220	273	275	275
	Z	50			60			62,5			78			97,5			125		
Weight	kg	5	5	6,5	10	9,5	12,5	18	17	22	33	31	40	64	60	76	130	120	160

8) for SAE 3000 pipe flange dimensions,
high pressure type up to 420 bar (see section 10.2)
low pressure type for up to 16 bar (see section 10.3)

9) for other shaft ends, contact Bucher Hydraulics

10) threaded port to DIN 3852, Part 2

11) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

4.2 Pressure range 1

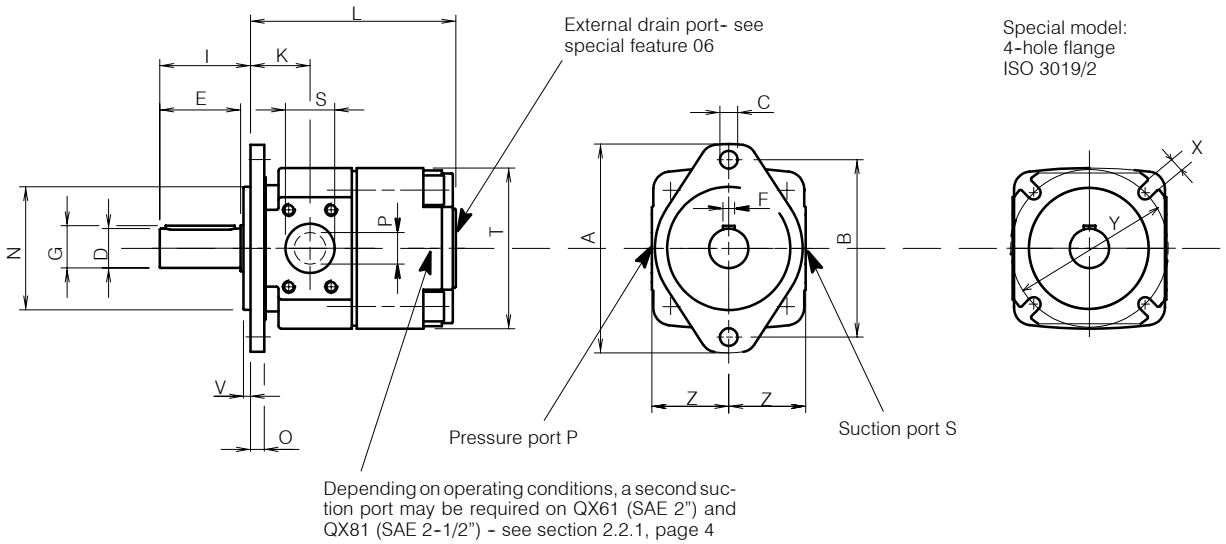

4.3 Pressure range 2

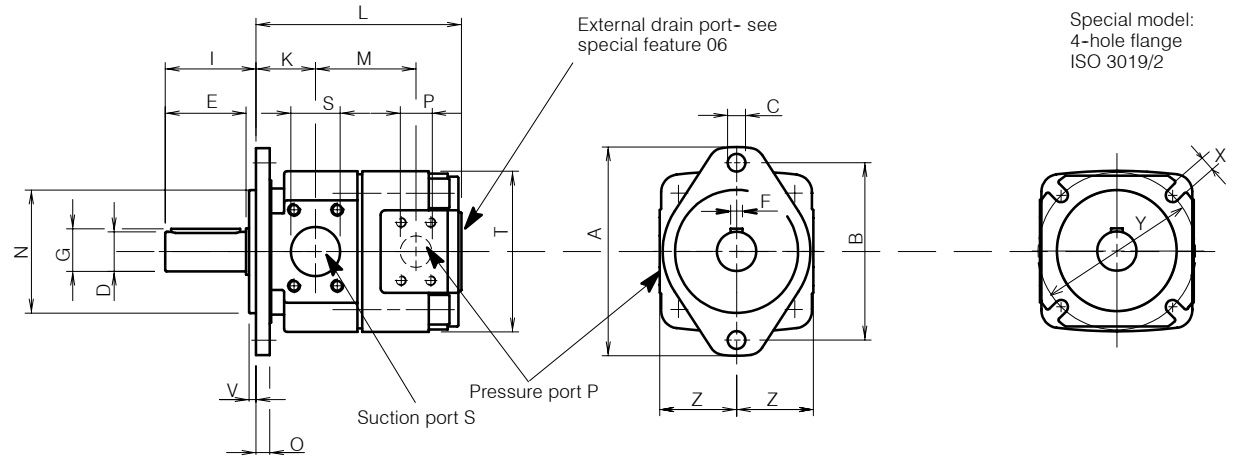

4.4 Pressure range 3

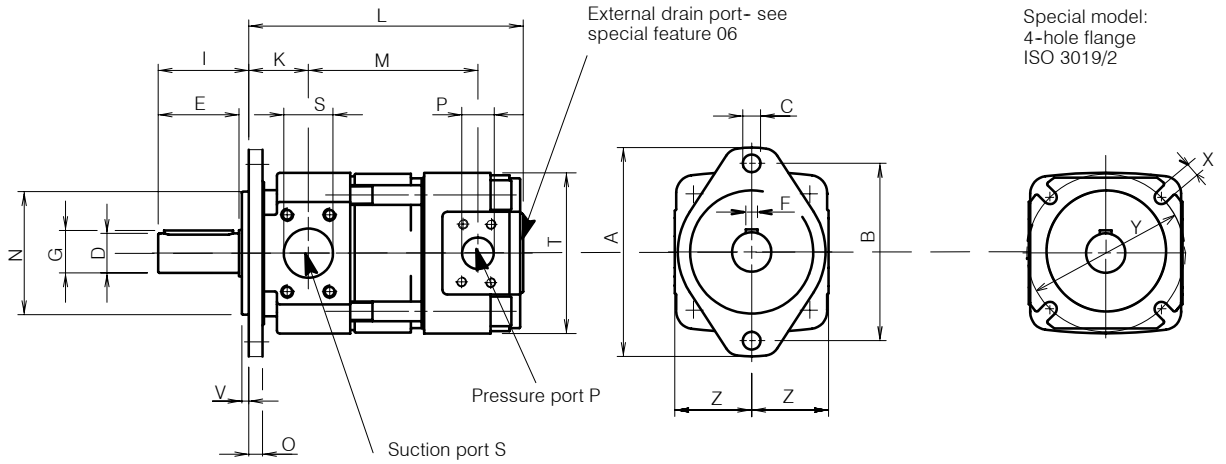

4.5 Ordering code for single pumps

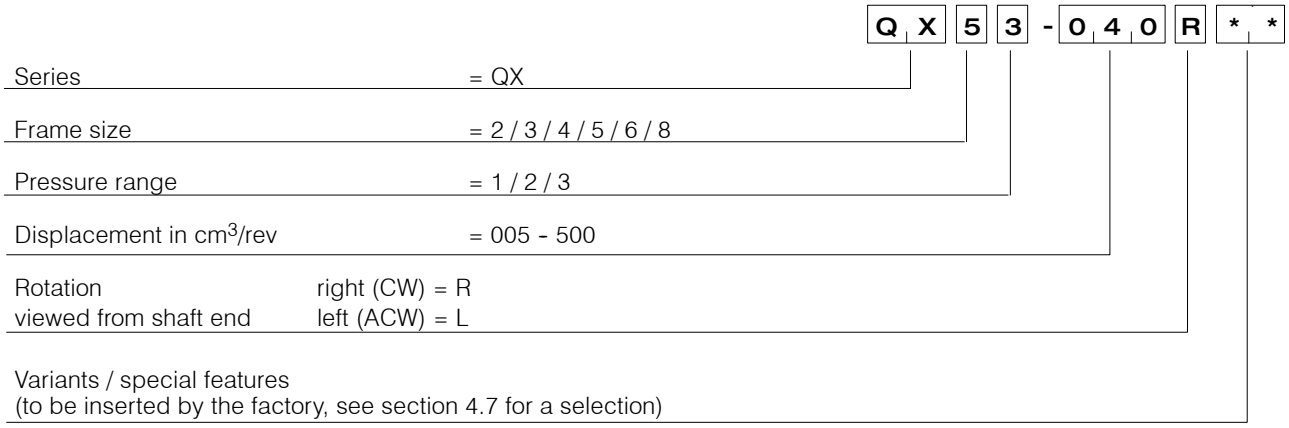
Q X 5 3 - 0 4 0 R * *
Series = QX
Frame size = 2 / 3 / 4 / 5 / 6 / 8
Pressure range = 1 / 2 / 3
Displacement in cm3/rev = 005 - 500
Rotation viewed from shaft end right (CW) = R
left (ACW) = L
Variants / special features
(to be inserted by the factory, see section 4.7 for a selection)

Ordering example:

Required: single pump
Displacement: 40cm^3/rev
Continuous pressure: 300 bar
for use with mineral oil
Ordering code: QX53-040R

4.6 Standard configuration

- direction of rotation - right (CW)
- 2-hole mounting flange to ISO 3019/1 (SAE): sizes QX 3-6
- 2-hole mounting flange to ISO 3019/2 (metr.): sizes QX 2+8
- Nitrile seals
- parallel shaft end to ISO/R775

4.7 Special features

06 = separate drain port in the pump rear cover
QX 2-5 G1/4”
QX 6 G3/8”
QX 8 G1/2”
09 = Viton seals
12 = 2-hole mounting flange to ISO 3019/2 (metric): size QX3-6
66 = 4-hole mounting flange to ISO 3019/2 (metric)
14 = operating temperatures to 160°C
29 = for HFB and HFC fluids, frame sizes 2 - 5
86 = for HFB and HFC fluids, frame sizes 6 + 8
83 = second suction port on:
QX61 = SAE 2”
QX81 = SAE 2 1/2”

5 Double pumps

QX double pumps consist of two single pumps mounted on a common drive shaft. Hydraulically, the two pumps operate independently of one another but they share a common suction port in the pump's centre section. The larger pump of the combination is situated at the shaft end (the drive side) and is referred to as Pump I. With equal frame sizes, the pump with the larger displacement is situated at the drive side.

Double pumps can be combined as shown in the following table. If a letter is shown at the intersection point of the two pumps, the letter identifies the page in section 5.2 that contains the relevant dimensional drawing. If there is no letter at the intersection point, then that pump combination is not possible.

5.1 Selection table

Pump 2

Pump 1 Displacement in cm³/rev	Pump 1 Maximum intermittent pressure in bar		Pump 2 Displacement in cm³/rev	Pump 2 Maximum permissible drive shaft torque (Nm)
5/6/8	250	QX22..	5/6/8	65
	400	QX23..		
	125/160 210	QX21..		
10/12/16	250	QX32..	10/12/16	130
	400	QX33..		
	125/160 210	QX31..		
20/25/32	250	QX42..	20/25/32	260
	400	QX43..		
	125/160 210	QX41..		
40/50/63	250	QX52..	40/50/63	520
	400	QX53..		
	125/160 210	QX51..		
80/100/125	250	QX62..	80/100/125	1050
	400	QX63..		
	125/160 210	QX61..		
160/200/250	250	QX82..	160/200/250	2100
	400	QX83..		
	125/160 210	QX81..		
315 400 500			315 400 500	

Pump 2 Maximum intermittent pressure in bar	5/6/8			10/12/16			20/25/32			40/50/63			80/100/125			160/200/250			315 400 500
	250	400	125 160 210	250	400	125 160 210	250	400	125 160 210	250	400	125 160 210	250	400	125 160 210	250	400	125 160 210	
	QX22...	QX23...	QX21...	QX32...	QX33...	QX31...	QX42...	QX43...	QX41...	QX52...	QX53...	QX51...	QX62...	QX63...	QX61...	QX82...	QX83...	QX81...	
250	E																		
400	H	I																	
125/160 210	B	C	A																
250	E	F	D	E															
400	H	I	G	H	I														
125/160 210	B	C	A	B	C	A													
250	E	F	D	E	F	D	E												
400	H	I	G	H	I	G	H	I											
125/160 210	B	C	A	B	C	A	B	C	A										
250	E	F	D	E	F	D	E	F	D	E									
400	H	I	G	H	I	G	H	I	G	H	I								
125/160 210	B	C	A	B	C	A	B	C	A	B	C	A							
250				E	F	D	E	F	D	E	F	D	E						
400				H	I	G	H	I	G	H	I	G	H	I					
125/160 210				B	C	A	B	C	A	B	C	A	B	C	A				
250							E	F	D	E	F	D	E	F	D	E			
400							H	I	G	H	I	G	H	I	G	H	I		
125/160 210							B	C	A	B	C	A	B	C	A	B	C	A	

5.2 Dimensions

A Double pump QX.1/.1

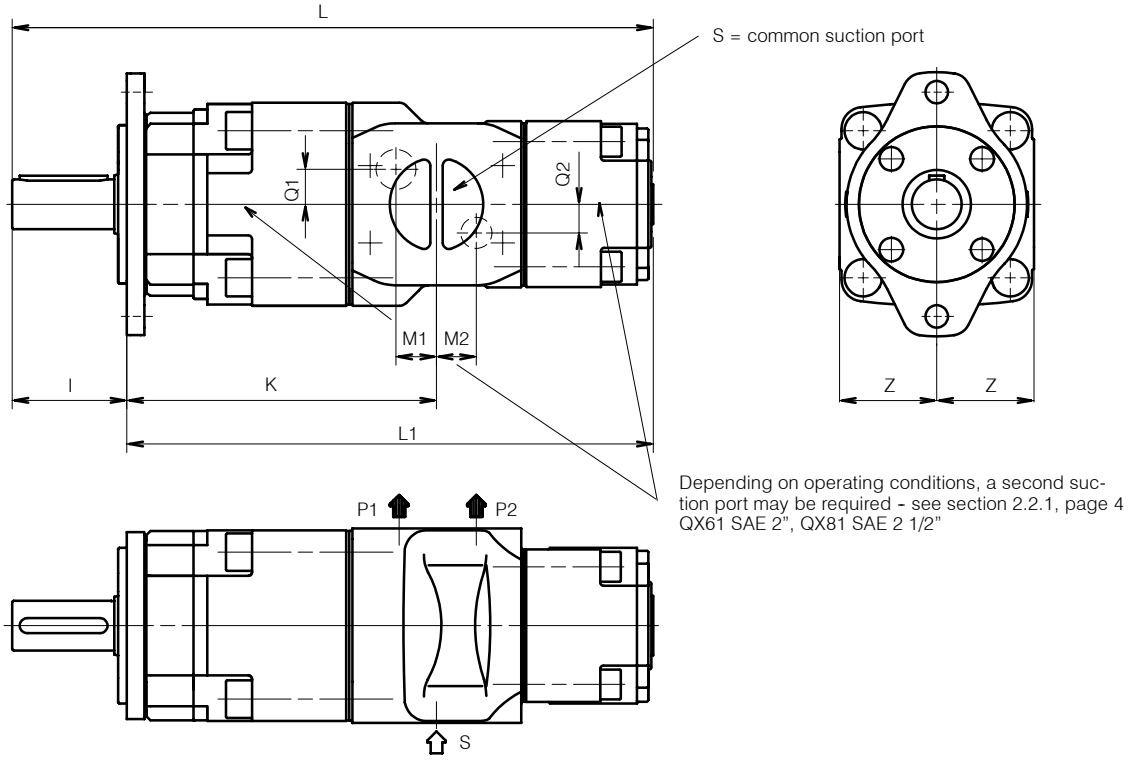

Depending on operating conditions, a second suction port may be required - see section 2.2.1, page 4 QX61 SAE 2", QX81 SAE 2 1/2"

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	Q2	I	Z	S	P1	P2
QX21/21	296	251	141	18	18	-	-	45	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX31/21	343	293	171	26	30			50	60	G 1 1/2" 1)	G 3/4" 1) 2)	
QX31/31	358	308			26							G 3/4" 1) 2)
QX41/21	396	328	201	20	35	15		68	63	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX41/31	411	343			33		15					G 3/4" 1) 2)
QX41/41	449	381	208	28	28	23	23					1" SAE
QX51/21	468	376	241	23	43	15	-	92	78	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX51/31	483	391			39		15					G 3/4" 1) 2)
QX51/41	521	429	249	30	32	28	23			SAE 3"		SAE 1"
QX51/51	547	455			30		28					SAE 1 1/4"
QX61/31	541	449	287	24	47	17	14	92	98		SAE 1 1/2"	G 3/4" 1) 2)
QX61/41	564	472		27	39	26	27					SAE 1"
QX61/51	601	509	292	32	40	35	28			SAE 3 1/2"		SAE 1 1/4"
QX61/61	628	536			32		35					SAE 1 1/2"
QX81/41	679	562	359	35	51	25	25	117	125		SAE 2"	SAE 1"
QX81/51	705	588			47		30					SAE 1 1/4"
QX81/61	732	615		38	45	40	35			SAE 4"		SAE 1 1/2"
QX81/81	774	657			38		40					SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

B Double pump QX.1/.2

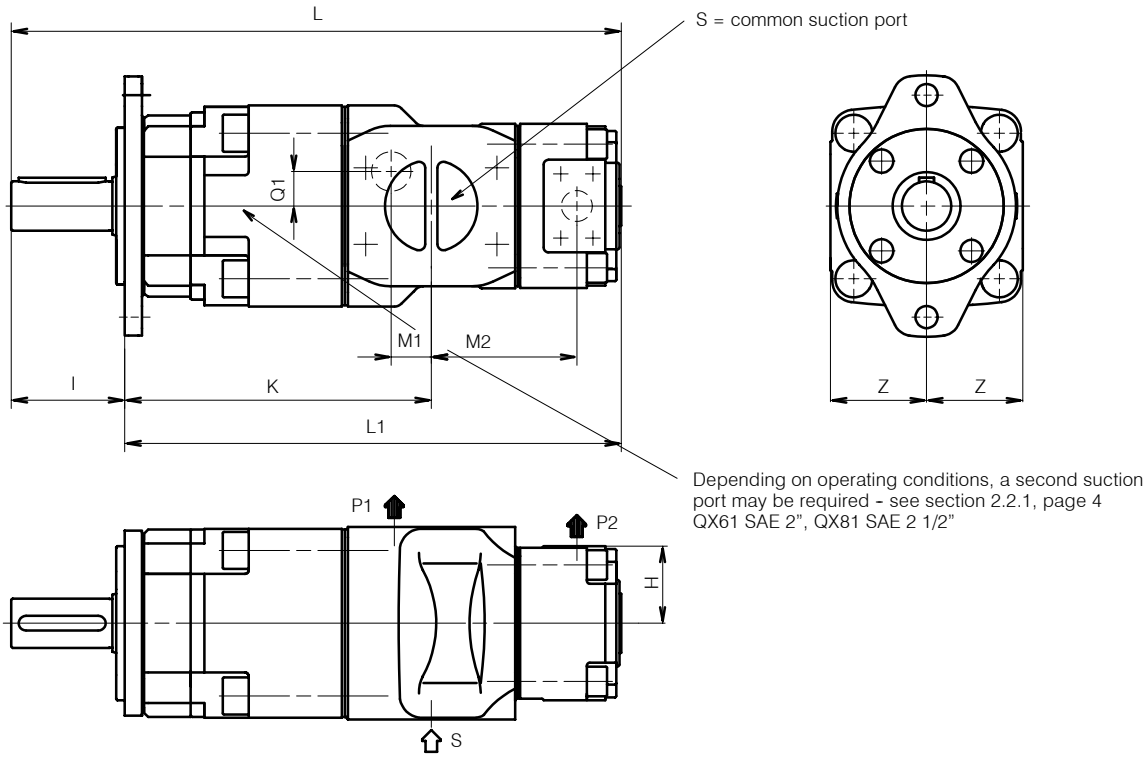

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	I	Z	H	S	P1	P2
QX21/22	278	233	141	18	67	-	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX31/22	325	275	171	26	79		50	60		G 1 1/2" 1)	G 3/4" 1) 2)	
QX31/32	338	288			87				60			G 3/4" 1) 2)
QX41/22	378	310	201	20	84	15	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX41/32	391	323			92				60			G 3/4" 1) 2)
QX41/42	423	355	208	28	111	23			63			SAE 1"
QX51/22	450	358	241	23	92	15	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX51/32	463	371			100				60			G 3/4" 1) 2)
QX51/42	495	403	249	30	118	28			63	SAE 3"		SAE 1"
QX51/52	515	423			127				78			SAE 1 1/4"
QX61/32	521	429	287	24	112	17	92	98	60		SAE 1 1/2"	G 3/4" 1) 2)
QX61/42	538	446		27	123	26			63			SAE 1"
QX61/52	569	477	292	32	137	35			78	SAE 3 1/2"		SAE 1 1/4"
QX61/62	588	496			149				98			SAE 1 1/2"
QX81/42	653	536	359	35	141	25	117	125	63		SAE 2"	SAE 1"
QX81/52	673	556			150				78			SAE 1 1/4"
QX81/62	692	575		38	162	40			98	SAE 4"		SAE 1 1/2"
QX81/82	724	607			179				125			SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

C Double pump QX.1/.3

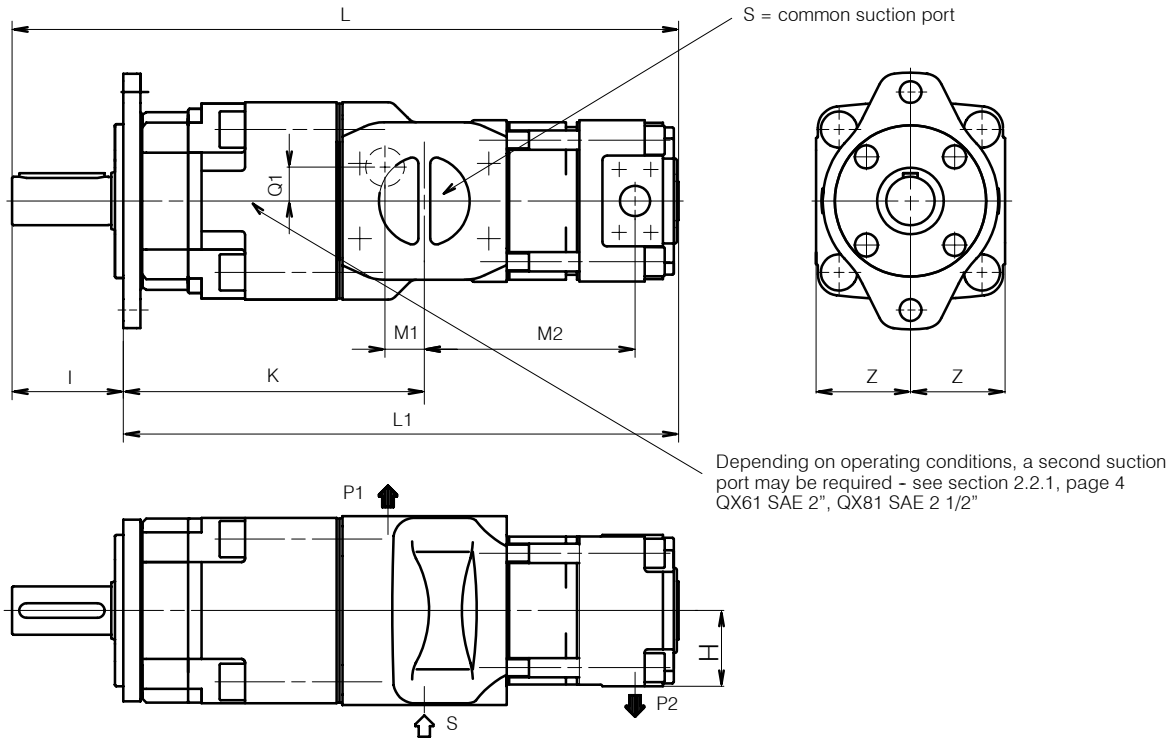

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q1	I	Z	H	S	P1	P2
QX21/23	313	268	141	18	102	-	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX31/23	360	310	171	26	114		50	60		G 1 1/2" 1)	G 3/4" 1) 2)	
QX31/33	383	333			132				60			G 3/4" 1) 2)
QX41/23	413	345	201	20	119	15	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX41/33	436	368			137				60			G 3/4" 1) 2)
QX41/43	479	411	208	28	167	23			63			SAE 1"
QX51/23	485	393	241	23	127	15	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX51/33	508	416			145				60			G 3/4" 1) 2)
QX51/43	551	459	249	30	174	28			63	SAE 3"		SAE 1"
QX51/53	585	493			197				78			SAE 1 1/4"
QX61/33	566	474	287	24	157	17	92	98	60		SAE 1 1/2"	G 3/4" 1) 2)
QX61/43	594	502		27	179	26			63			SAE 1"
QX61/53	637	545	292	32	207	35			78	SAE 3 1/2"		SAE 1 1/4"
QX61/63	678	586			239				98			SAE 1 1/2"
QX81/43	709	592	359	35	197	25	117	125	63		SAE 2"	SAE 1"
QX81/53	743	626			220				78			SAE 1 1/4"
QX81/63	782	665		38	252	40			98	SAE 4"		SAE 1 1/2"
QX81/83	839	722			294				125			SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

D Double pump QX.2/.1

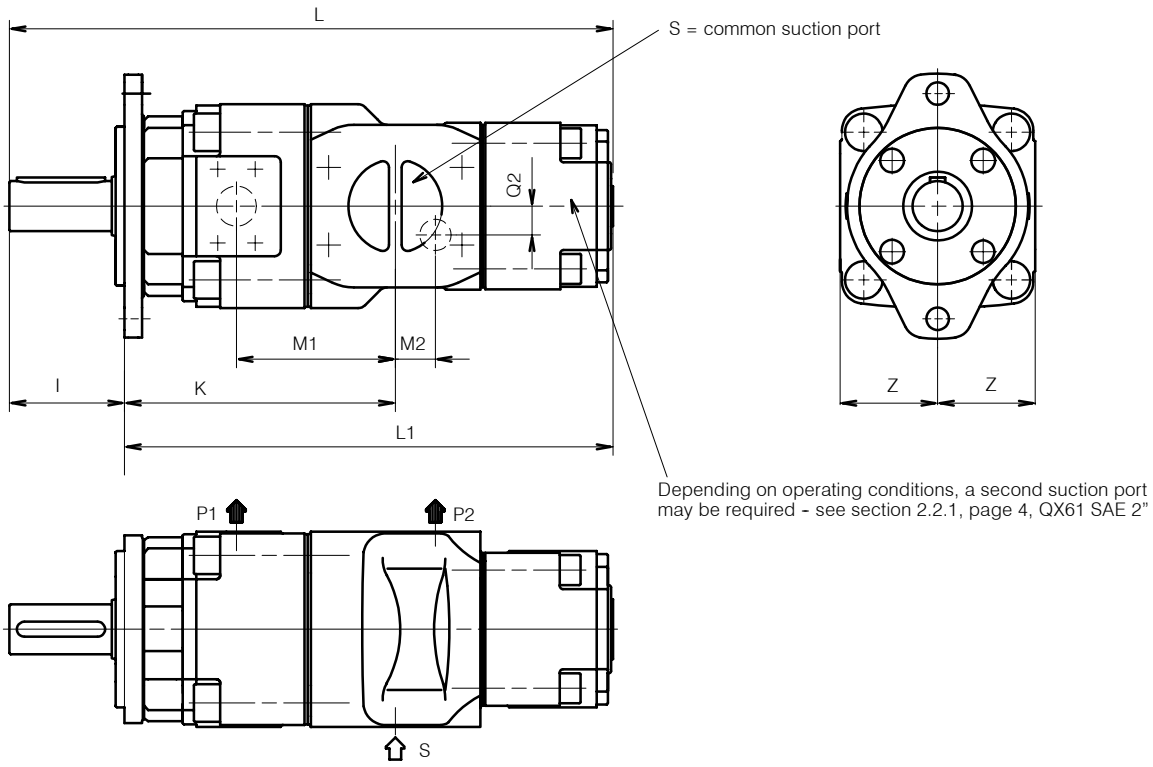

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q2	I	Z	S	P1	P2
QX32/21	323	273	151	87	30	-	50	60	G 1 1/2” 1)	G 3/4” 1) 2)	G 1/2” 1) 2)
QX42/21	370	302	175	103	35		68	63	SAE 2”	SAE 1”	
QX42/31	385	317			33	15					G 3/4” 1) 2)
QX52/21	436	344	209	120	43	-	92	78	SAE 2 1/2”	SAE 1 1/4”	G 1/2” 1) 2)
QX52/31	451	359			39	15					G 3/4” 1) 2)
QX52/41	489	397	217	127	32	23			SAE 3”		SAE 1”
QX62/31	501	409	247	144	47	14	92	98			G 3/4” 1) 2)
QX62/41	524	432			39	27				SAE 1 1/2”	SAE 1”
QX62/51	561	469	252	149	40	28			SAE 3 1/2”		SAE 1 1/4”
QX82/41	629	512	309	179	51	25	117	125		SAE 2”	SAE 1”
QX82/51	655	538			47	30					SAE 1 1/4”
QX82/61	682	565			45	35			SAE 4”		SAE 1 1/2”

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

E Double pump QX.2/.2

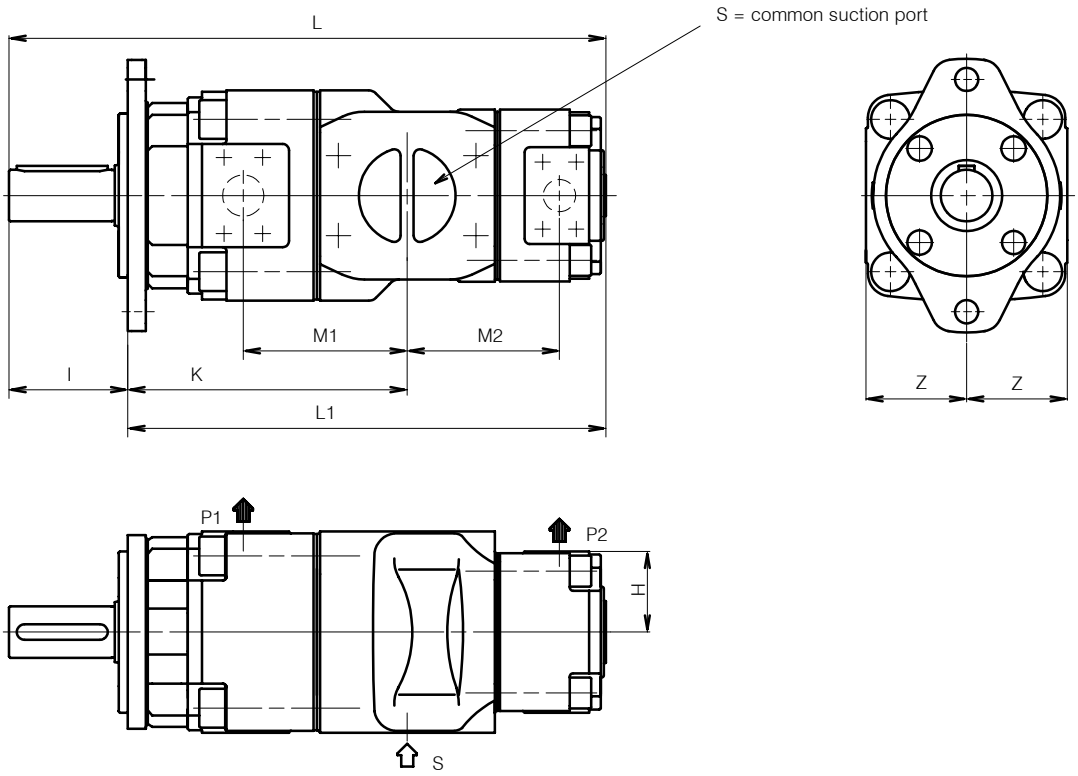

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX22/22	260	215	123	67	67	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX32/22	305	255	151	87	79	50	60		G 1 1/2" 1)	G 3/4" 1) 2)	
QX32/32	318	268			87			60			G 3/4" 1) 2)
QX42/22	352	284	175	103	84	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX42/32	365	297			92			60			G 3/4" 1) 2)
QX42/42	397	329	182	111	111			63			SAE 1"
QX52/22	418	326	209	120	92	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX52/32	431	339			100			60			G 3/4" 1) 2)
QX52/42	463	371	217	127	118			63	SAE 3"		SAE 1"
QX52/52	483	391			127			78			SAE 1 1/4"
QX62/32	481	389	247	144	112	92	98	60		SAE 1 1/2"	G 3/4" 1) 2)
QX62/42	498	406			123			63			SAE 1"
QX62/52	529	437	252	149	137			78	SAE 3 1/2"		SAE 1 1/4"
QX62/62	548	456			149			98			SAE 1 1/2"
QX82/42	603	486	309	179	141	117	125	63		SAE 2"	SAE 1"
QX82/52	623	506			150			78			SAE 1 1/4"
QX82/62	642	525			162			98	SAE 4"		SAE 1 1/2"
QX82/82	674	557			179			125			SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

F Double pump QX.2/.3

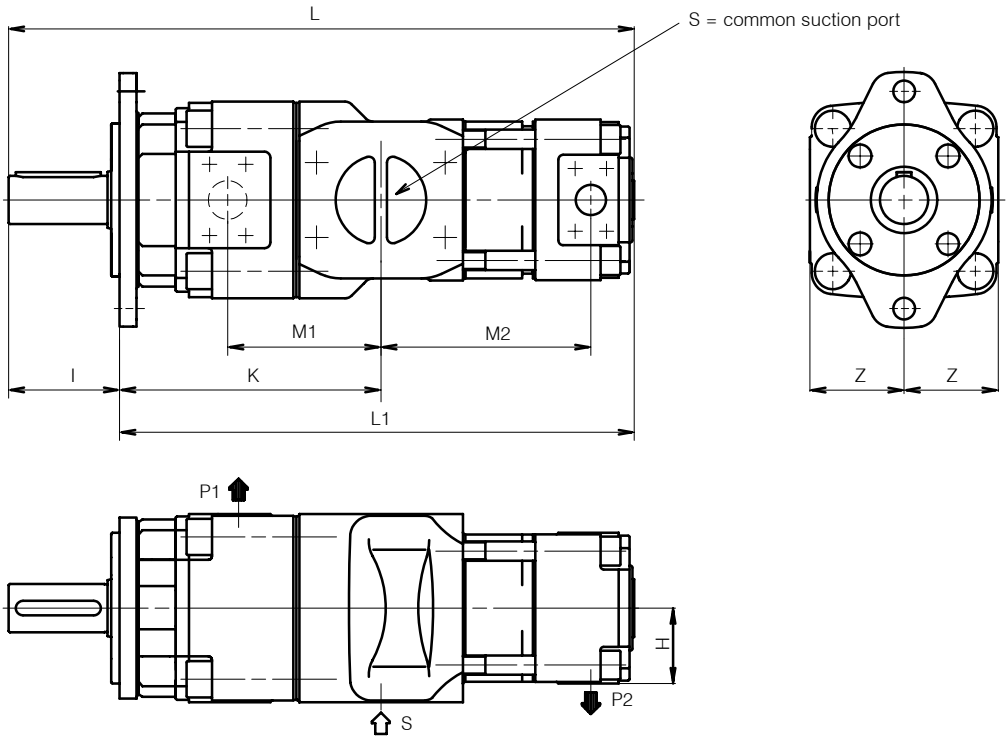

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX32/23	340	290	151	87	114	50	60	50	G 1 1/2" 1)	G 3/4" 1) 2)	G 1/2" 1) 2)
QX42/23	387	319	175	103	119	68	63		SAE 2"	SAE 1"	
QX42/33	410	342			137			60			G 3/4" 1) 2)
QX52/23	453	361	209	120	127	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX52/33	476	384			145			60			G 3/4" 1) 2)
QX52/43	519	427	217	127	174			63	SAE 3"		SAE 1"
QX62/33	526	434	247	144	157	92	98	60		SAE 1 1/2"	G 3/4" 1) 2)
QX62/43	554	462			179			63			SAE 1"
QX62/53	599	507	252	149	207			78	SAE 3 1/2"		SAE 1 1/4"
QX82/43	659	542	309	179	197	117	125	63		SAE 2"	SAE 1"
QX82/53	693	576			220			78			SAE 1 1/4"
QX82/63	732	615			252			98	SAE 4"		SAE 1 1/2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

G Double pump QX.3/.1

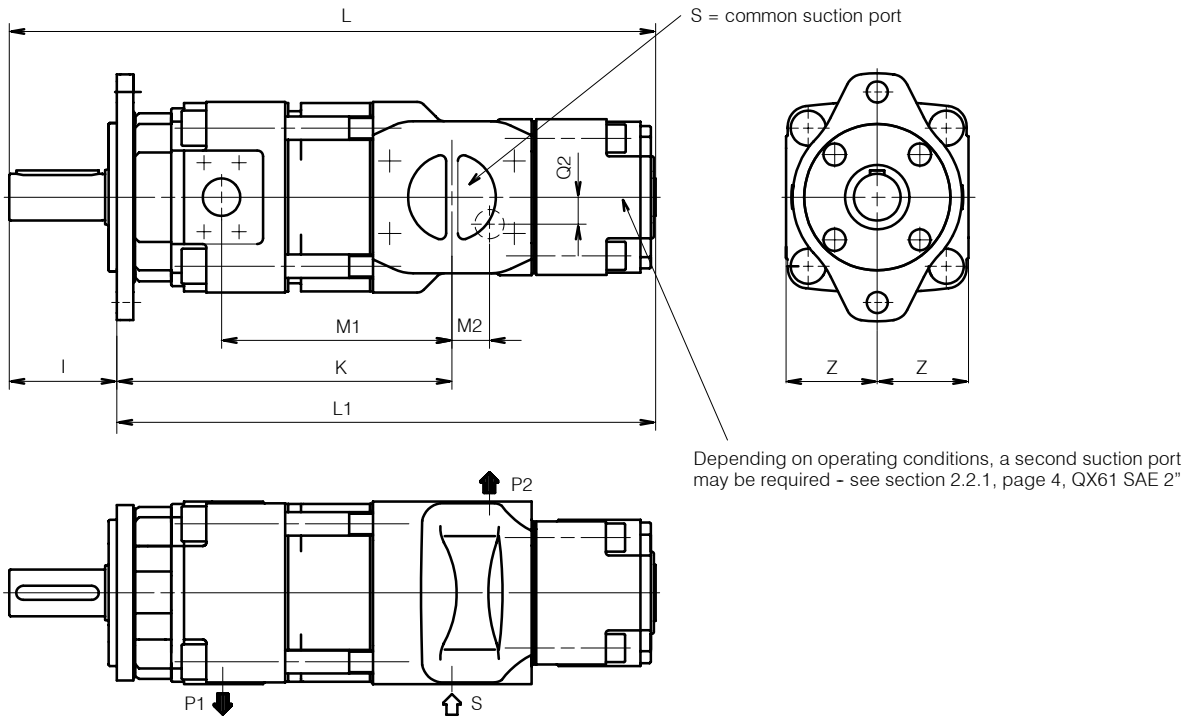

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	Q2	I	Z	S	P1	P2
QX33/21	368	318	196	132	30	-	50	60	G 1 1/2” 1)	G 3/4” 1) 2)	G 1/2” 1) 2)
QX43/21	426	358	231	159	35		68	63	SAE 2”	SAE 1”	
QX43/31	441	373			33	15					G 3/4” 1) 2)
QX53/21	506	414	279	190	43	-	92	78	SAE 2 1/2”	SAE 1 1/4”	G 1/2” 1) 2)
QX53/31	521	429			39	15					G 3/4” 1) 2)
QX53/41	559	467	287	197	32	23			SAE 3”		SAE 1”
QX63/31	591	499	337	234	47	14	92	98			G 3/4” 1) 2)
QX63/41	614	522			39	27				SAE 1 1/2”	SAE 1”
QX63/51	651	559	342	239	40	28					SAE 1 1/4”
QX83/41	744	627	424	294	51	25	117	125	SAE 3 1/2”	SAE 2”	SAE 1”
QX83/51	770	653			47	30					SAE 1 1/4”
QX83/61	797	680			45	35			SAE 4”		SAE 1 1/2”

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

H Double pump QX.3/.2

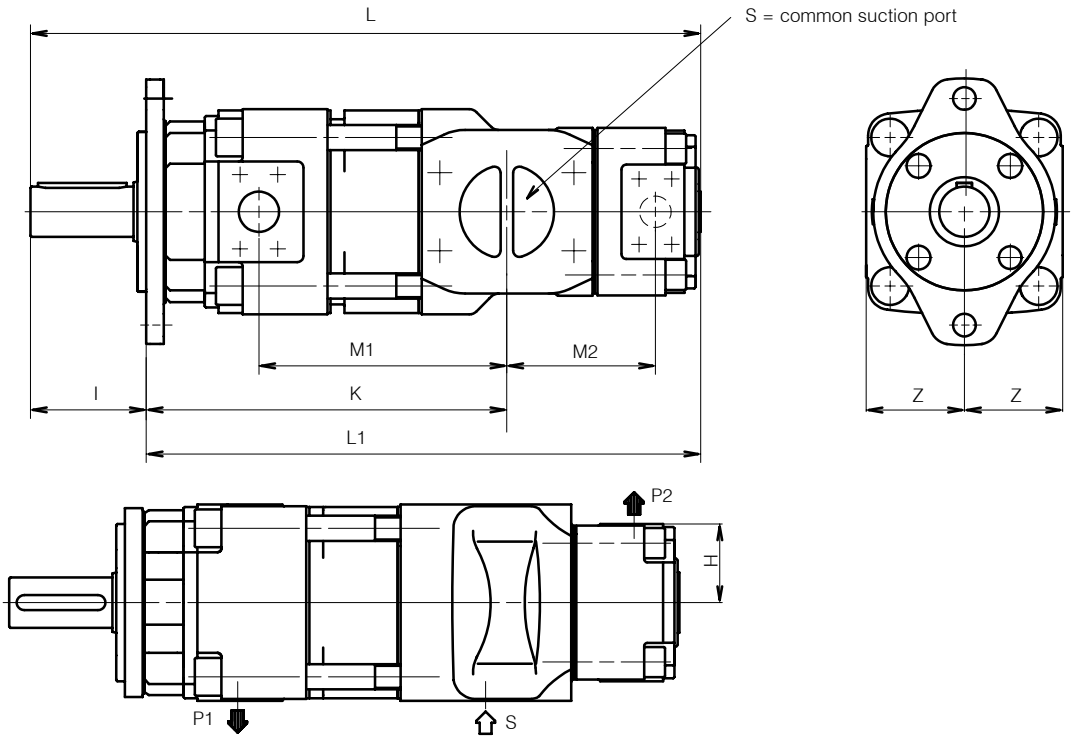

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX23/22	295	250	158	102	67	45	50	50	G 1 1/4" 1)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX33/22	350	300	196	132	79	50	60		G 1 1/2" 1)	G 3/4" 1) 2)	
QX33/32	363	313			87			60			G 3/4" 1) 2)
QX43/22	408	340	231	159	84	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX43/32	421	353			92			60			G 3/4" 1) 2)
QX43/42	453	385	238	167	111			63			SAE 1"
QX53/22	488	396	279	190	92	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX53/32	500	408			100			60			G 3/4" 1) 2)
QX53/42	533	441	287	197	118			63	SAE 3"		SAE 1"
QX53/52	553	461			127			78			SAE 1 1/4"
QX63/32	571	479	337	234	112	92	98	60		SAE 1 1/2"	G 3/4" 1)
QX63/42	588	496			123			63			SAE 1"
QX63/52	619	527	342	239	137			78	SAE 3 1/2"		SAE 1 1/4"
QX63/62	638	546			149			98			SAE 1 1/2"
QX83/42	718	601	424	294	141	117	125	63		SAE 2"	SAE 1"
QX83/52	738	621			150			78			SAE 1 1/4"
QX83/62	757	640			162			98	SAE 4"		SAE 1 1/2"
QX83/82	789	672			179			125			SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

I Double pump QX.3/.3

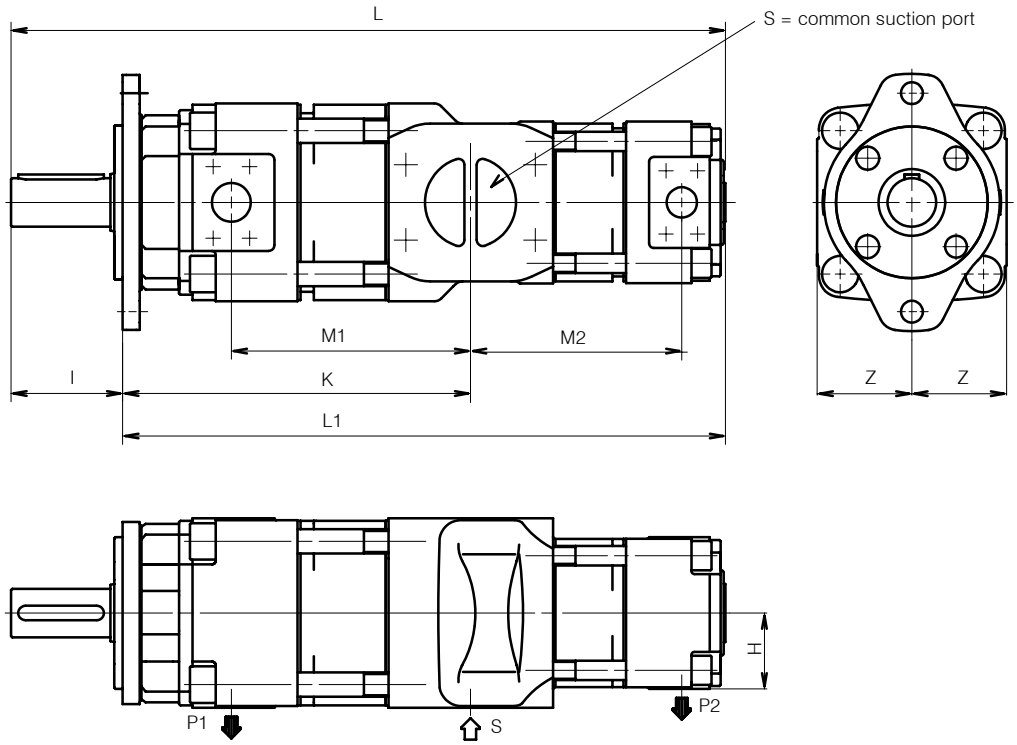

Shaft and mounting dimensions - see section 4

Type	L	L1	K	M1	M2	I	Z	H	S	P1	P2
QX23/23	330	285	158	102	102	45	50	50	G 1 1/4" 1) 2)	G 1/2" 1) 2)	G 1/2" 1) 2)
QX33/23	385	335	196	132	114	50	60		G 1 1/2" 1) 2)	G 3/4" 1) 2)	
QX33/33	408	358			132			60			G 3/4" 1) 2)
QX43/23	442	374	231	159	119	68	63	50	SAE 2"	SAE 1"	G 1/2" 1) 2)
QX43/33	466	398			137			60			G 3/4" 1)
QX43/43	509	441	238	167	167			63			SAE 1"
QX53/23	523	431	279	190	127	92	78	50	SAE 2 1/2"	SAE 1 1/4"	G 1/2" 1) 2)
QX53/33	546	454			145			60			G 3/4" 1) 2)
QX53/43	589	497	287	197	174			63	SAE 3"		SAE 1"
QX53/53	623	531			197			78			SAE 1 1/4"
QX63/33	616	524	337	234	157	92	98	60		SAE 1 1/2"	G 3/4" 1) 2)
QX63/43	644	552			179			63			SAE 1"
QX63/53	689	597	342	239	207			78	SAE 3 1/2"		SAE 1 1/4"
QX63/63	728	636			239			98			SAE 1 1/2"
QX83/43	774	657	424	294	197	117	125	63		SAE 2"	SAE 1"
QX83/53	808	691			220			78			SAE 1 1/4"
QX83/63	847	730			252			98	SAE 4"		SAE 1 1/2"
QX83/83	904	787			294			125			SAE 2"

1) threaded port to DIN 3852, Part 2
2) pressure port to SAE J 518 can be supplied for pressure ranges 2+3

5.3 Ordering code for double pumps

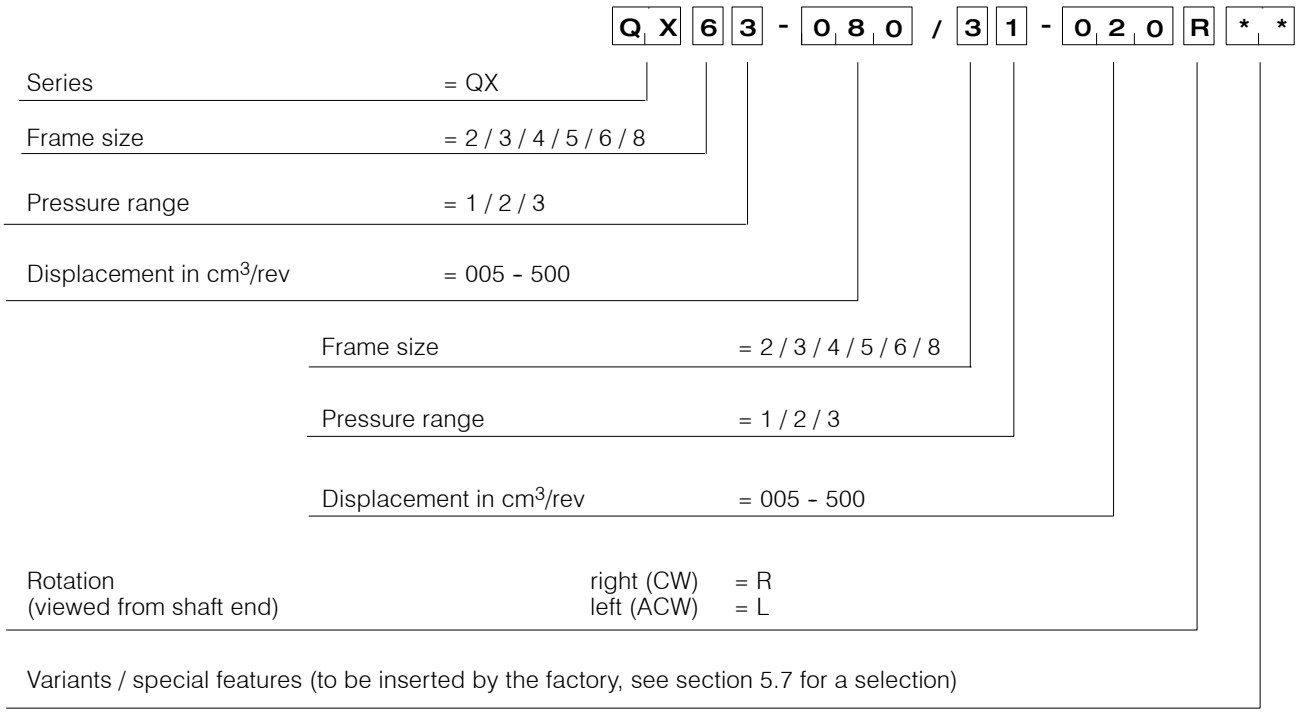
Q X 6 3 - 0 8 0 / 3 1 - 0 2 0 R * *
Series = QX
Frame size = 2 / 3 / 4 / 5 / 6 / 8
Pressure range = 1 / 2 / 3
Displacement in cm3/rev = 005 - 500
Frame size = 2 / 3 / 4 / 5 / 6 / 8
Pressure range = 1 / 2 / 3
Displacement in cm3/rev = 005 - 500
Rotation (viewed from shaft end)
right (CW) = R
left (ACW) = L
Variants / special features (to be inserted by the factory, see section 5.7 for a selection)

Ordering example:

Required:	double pump
Pump 1	
Displacement:	80 cm³/rev
Continuous pressure:	300 bar
Type:	63-080
Pump 2	
Displacement:	20 cm³/rev
Continuous pressure:	160 bar
Type:	31-020
for use with mineral oil	
Ordering code:	QX63-080/31-020R

6 Triple pumps

All of the triple pump combinations that can be supplied are listed in the following table. The individual pumps 1, 2 and 3 must be specified in accordance with the main characteristics shown in section 2.

The largest pump of the combination is situated at the shaft end and is referred to as Pump 1. For equal frame sizes, the pump with the larger displacement is situated at the drive side. Pumps 2 and 3 have a common suction port.

6.1 Selection table

Frame size of Pump 1					
QX2.	QX3.	QX4.	QX5.	QX6.	QX8.
QX21/21/2.	QX31/31/3.	QX41/41/4.	QX51/51/5.	QX61/61/6.	QX81/81/8.
QX21/22/22	QX31/32/32	QX41/42/42	QX51/52/52	QX61/62/62	QX81/82/82
QX21/22/23	QX31/32/33	QX41/42/43	QX51/52/53	QX61/62/63	QX81/82/83
QX22/22/22	QX32/32/32	QX42/42/42	QX52/52/52	QX62/62/62	QX82/82/82
QX22/22/23	QX32/32/33	QX42/42/43	QX52/52/53	QX62/62/63	QX82/82/83
QX2./23/23	QX3./33/33	QX4./43/43	QX5./53/53	QX6./63/63	QX8./83/83
	QX31/3./2.	QX41/4./3.	QX51/5./4.	QX61/6./5.	QX81/8./6.
	QX32/32/2.	QX42/42/3.	QX52/52/4.	QX62/62/5.	QX82/82/6.
	QX3./33/2.	QX4./43/3.	QX5./53/4.	QX6./63/5.	QX8./83/6.
	QX3./21/2.	QX41/4./2.	QX51/5./3.	QX61/6./4.	QX81/8./5.
	QX3./22/22	QX42/42/2.	QX52/52/3.	QX62/62/4.	QX82/82/5.
	QX3./22/23	QX4./43/2.	QX5./53/3.	QX6./63/4.	QX8./83/5.
	QX3./23/23	QX4./31/3.	QX51/5./2.*	QX61/6./3.	QX81/8./4.
		QX4./32/32	QX52/52/2.	QX62/62/3.	QX82/82/4.
		QX4./32/33	QX5./53/2.	QX6./63/3.	QX8./83/4.
		QX4./33/33	QX5./41/4.	QX6./51/5.	QX8./61/6.
		QX4./21/2.	QX5./42/42	QX6./52/52	QX8./62/62
		QX4./22/22	QX5./42/43	QX6./52/53	QX8./62/63
		QX4./22/23	QX5./43/43	QX6./53/53	QX8./63/63
		QX4./23/23	QX5./4./2.	QX6./5./3.	QX8./6./4.
			QX5./31/3.	QX6./5./2.	QX8./6./3.
			QX5./32/32	QX6./41/4.	QX8./51/5.
			QX5./32/33	QX6./42/42	QX8./52/52
			QX5./33/33	QX6./42/43	QX8./52/53
			QX5./21/2.	QX6./43/43	QX8./53/53
			QX5./22/22	QX6./4./2.	QX8./5./3.
			QX5./22/23	QX6./31/3.	QX8./5./2.
			QX5./23/23	QX6./32/32	QX8./41/4.
				QX6./32/33	QX8./42/42
				QX6./33/33	QX8./42/43
					QX8./43/43
					QX8./4./2.
65	130	260	520	1050	2100

Maximum permissible drive shaft torque in Nm

In the above type codes, any dots (.) can be replaced by the pressure range 1, 2 or 3.

* this pump is used as the ordering example in section 6.2

6.2 Ordering code for triple pumps

Q	X	5	1	-	1	2	5	/	5	1	-	0	8	0	/	2	3	-	0	0	8	R	*	*

Series = QX

Frame size = 2 / 3 / 4 / 5 / 6 / 8

Pressure range = 1 / 2 / 3

Displacement in cm^3/rev = 005 - 500

Frame size = 2 / 3 / 4 / 5 / 6 / 8

Pressure range = 1 / 2 / 3

Displacement in cm^3/rev = 005 - 500

Frame size = 2 / 3 / 4 / 5 / 6 / 8

Pressure range = 1 / 2 / 3

Displacement in cm^3/rev = 005 - 500

Rotation (viewed from shaft end): right (CW) = R; left (ACW) = L

Variants / special features (to be inserted by the factory, see section 4.7 for a selection)

Ordering example:

Required: triple pump

Pump 1		Pump 2		Pump 3	
Displacement:	125 cm^3/rev	Displacement:	80 cm^3/rev	Displacement:	8cm^3/rev
Continuous pressure:	80 bar	Continuous pressure:	150 bar	Continuous pressure:	320 bar
Type:	51-125	Type:	51-080	Type:	23-008

For use with mineral oil

Referring to the selection table in sect. 6.1,
QX51/51/23 is an obtainable combination.
Ordering code: QX51-125/51-080/23-008R

6.2.1 Layout of the selected pump

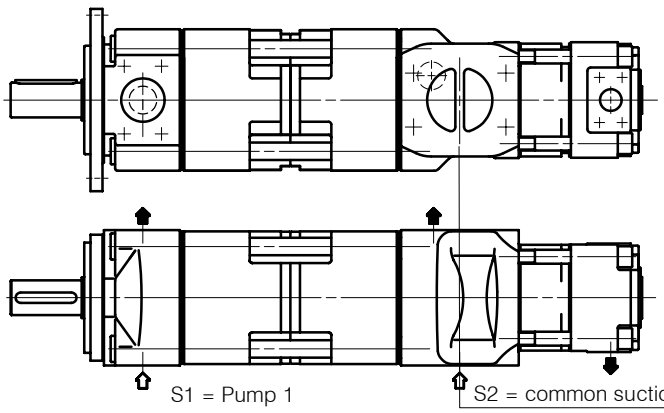

7 Pressure-holding pumps

7.1 Generals

The QX high pressure internal gear pump is a further development of the Bucher internal gear pump, which has proven itself in more than 30 years of service around the world. With displacements of 3 and 4 cm^3/rev, it extends the low-flow capability of the QX range.

Advantages:

- High pressures
- Low noise level
- Long service life
- Negligible flow- and pressure-pulsations
- Insensitive to contamination of the fluid

7.2 Technical date

Mounting attitude	unrestricted
Mounting method (standard)	oval 2-hole flange to ISO 3019/2 (metric)
Direction of rotation	right, alternatively left (but not reversible)
Pump drive method	in-line, by flexible coupling
Fluids	HLP mineral oils to DIN 51524, Part 2 HFC fluids to VDMA 24317 other fluids - consult Bucher Hydraulics
Minimum fluid cleanliness	NAS 1638, class 9 or ISO 4406, code 20/18/15
Viscosity range	20 ... 300 mm^2/s (for values outside this range, consult Bucher Hydraulics)
Fluid temperature	HLP mineral oils 80 °C max. HFC 50 °C max.
Minimum inlet pressure	0.85 bar absolute
Maximum pressure at drain port	1.5 bar absolute
External drain port	is always provided

7.3 Main characteristics

Effective displacement	Flow rate [1]	Maximum speed	Type	Mineral oil to DIN 51524 Cont./Max. interm. pressure [2]	HFC to VDMA 24317 Cont./Max. interm. pressure [2]	Torque [3]	Power requirement [4]
cm^3/rev	l/min	rpm		bar	bar	Nm	kW
3.3	4.8	3600	QX24-003	320 / 400	280 / 350	17	2.6
4.2	6.2	3600	QX24-005	320 / 400	280 / 350	21	3.2

This operating data is valid for hydraulic oils as well as fire-resistant and environmentally-friendly fluids with a viscosity of 42 mm^2/s

3) at speed n = 1450 rpm (theoretical)

4) maximum intermittent pressure for max. 20 sec. but not more than 10% of the duty cycle

5) theoretical value at the max. permitted continuous pressure for mineral oil

6) theoretical value at the max. permitted continuous pressure for mineral oil at n = 1450 rpm

7.4 Efficiency

Measured at speed n = 1450 rpm
Viscosity 42 mm ^{2}/s

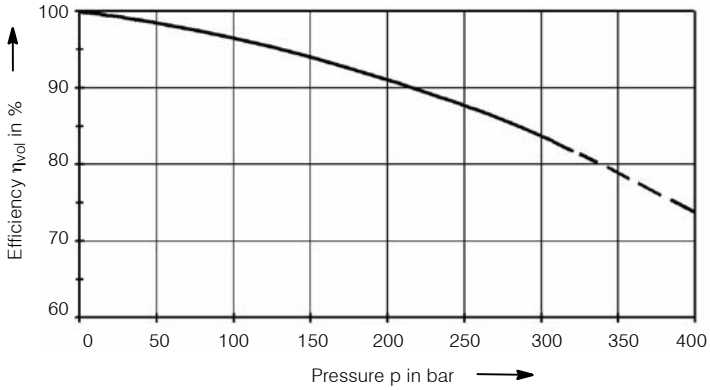

7.5 Single pump

7.5.1 Dimensions

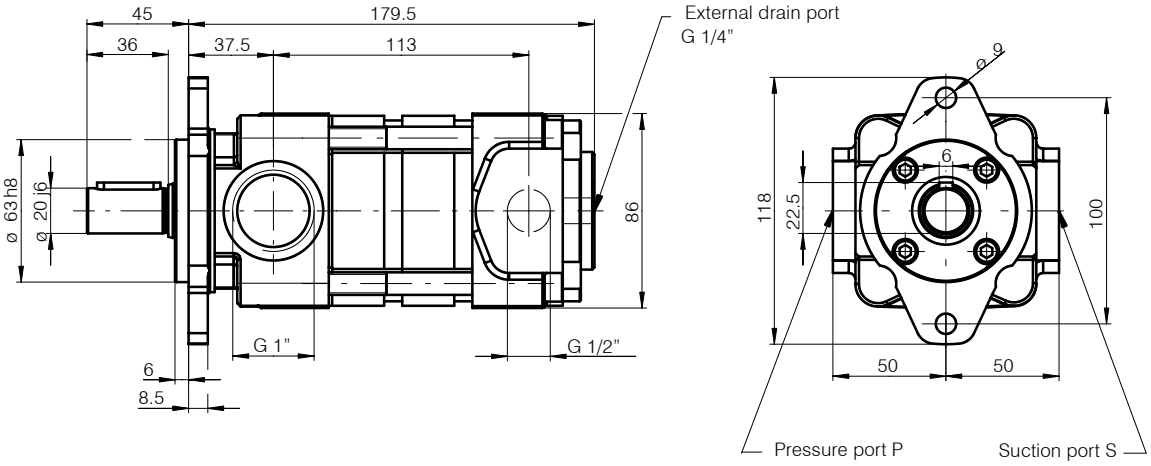

7.5.2 Ordering code

Q	X	2	4	-	0	0	4	R	*	*

Series		= QX
Size		= 2
Pressure range		= 4
Displacement in cm^3/rev		= 003 and 004
Direction of rotation	right	= R
	left	= L

Variants / special features (to be inserted by the factory, see section 7.5.4 for a selection)

7.5.3 Standard confguration

- direction of rotation “right ”
- 2- hole mounting flange to ISO 3019/2 (metric)
- Nitrile seals
- cylindrical shaft end to ISO R775
- separate drain port G 1/4 in rear cover of the pump

7.5.4 Special features

09 = Viton seals

7.6 Pressure-holding pump compined also QX-pump

7.6.1 Dimensions

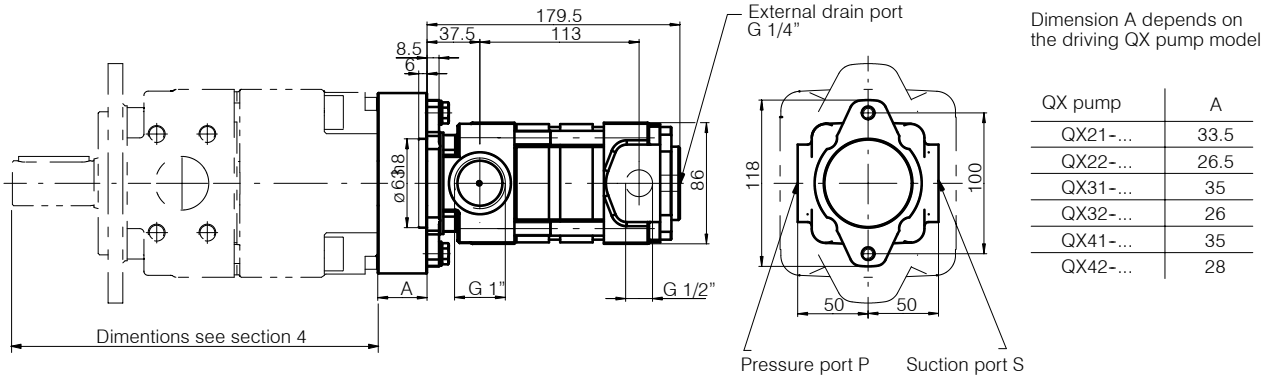

Dimension A depends on the driving QX pump model

QX pump	A
QX21-...	33.5
QX22-...	26.5
QX31-...	35
QX32-...	26
QX41-...	35
QX42-...	28

7.6.2 Ordering code

Q	X	4	1	-	0	4	0	/	2	4	-	0	0	4	R	3	2	4

Series	= QX	
Size	= 2 / 3 / 4 / 5 / 6 / 8	
Pressure range	= 1 / 2 / 3	
Displacement in cm³/rev	= 005 bis 500	
Size	= 2	
Pressure range	= 4	
Displacement in cm³/rev	= 003 and 004	
Direction of rotation	right	= R
	left	= L

Ordering example:

Requird: Double pump

Pump 1	
Displacement:	40 cm^3/rev
Continuous pressure:	160 bar
Type:	41 - 040
Pump 2	
Displacement:	4 cm^3/rev
Continuous pressure:	250 bar
Type:	24 - 003
For use with mineral oil:	
Ordering code:	QX41-040/24-004R 324

8 Fluid cleanliness

QX pumps require fluid with a minimum cleanliness level of NAS 1638, Class 9 or ISO 4406, code 20/18/15. This can be achieved with a filter ratio of $ß_{10} \geq 100$.

HLP hydraulic oils to DIN 51524, Part 2, can be used without any special restriction as long as they remain within the specified temperature and viscosity ranges. HFC fire-resistant fluids to DIN 51502 can be used with the QR, QT, QX and QXM series. Note that all fire-resistant fluids require special versions of the pumps or motors and must be approved by Bucher Hydraulics. We recommend the use of fluids that contain anti-wear additives for mixed-friction operating conditions. Fluids without appropriate additives can reduce the service life of pumps and motors. The user is responsible for maintaining, and regularly checking, the fluid quality. Bucher Hydraulics recommends a load capacity of $\geq$ 30 N/mm^2 to Brugger DIN 51347-2.

9 Note

This catalogue is intended for users with specialist knowledge. The user must check the suitability of the equipment described herein in order to ensure that all of the conditions necessary for the safety and proper functioning of the system are fulfilled. If you have any doubts or questions concerning the use of these pumps, please consult Bucher Hydraulics.

10 Accessories

10.1 Bolt-on valves - SAE 3000 pattern

Ordering details	Pressure relief A S/G DF / A S/G DH	Pressure relief solenoid control A S/G DA / ASDM	Pressure relief proportional solenoid control A S/G DP
Symbols			

Ordering details	Unloading valve A S/G AF	Accumulator charging valve A S/G SF
Symbols		

S = for pipe flange SAE 3000 pattern
R = with threaded port

10.2 Pipe flange - high pressure type for up to 420 bar - SAE 3000 pattern

Dimensions



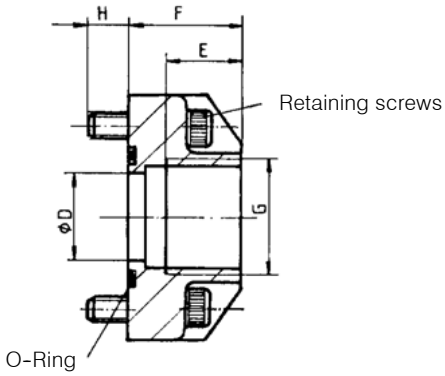

Threaded pipe flanges are spot-faced for DIN 2353 pipe fittings

Material: ST37
For Viton seals, contact Bucher Hydraulics

Order-ingnum-ber	Ordering code	Size	DØ	E	F	H	L	R	X	Y	O-ring 90 Shore 'A'	Retaining screws DIN912-12.9	Torque Nm
037000	RF 01-R08	G 1/2"	12,5	16	27	13	54	23	17,5	38	20,24x2,62	M 8x30	30
037010	RF 02-R10	G 3/4"	20	18	30	12	65	26	22,2	47,6	26,65x2,62	M 10x30	60
037020	RF 03-R11	G 1"	25	20	34	13	70	29	26,2	52,4	32,99x2,62	M 10x35	60
037030	RF 04-R12	G 1 1/4"	32	22	38	14	80	36	30,2	58,6	40,86x3,53	M 10x40	60
037040	RF 05-R13	G 1 1/2"	38	24	41	19	94	41	35,7	70	44,04x3,53	M12x45	120
037050	RF 06-R14	G 2"	50	26	45	20	102	48	42,9	77,8	59,92x3,53	M12x50	120
055470	RF 07-R16	G 2 1/2"	63	30	50	18	114	57	50,8	89	72,62x3,53	M12x45	120

* at RF07 only to 210 bar be allowed

10.3 Low pressure type for up to 16 bar - SAE 3000 pattern

Dimensions

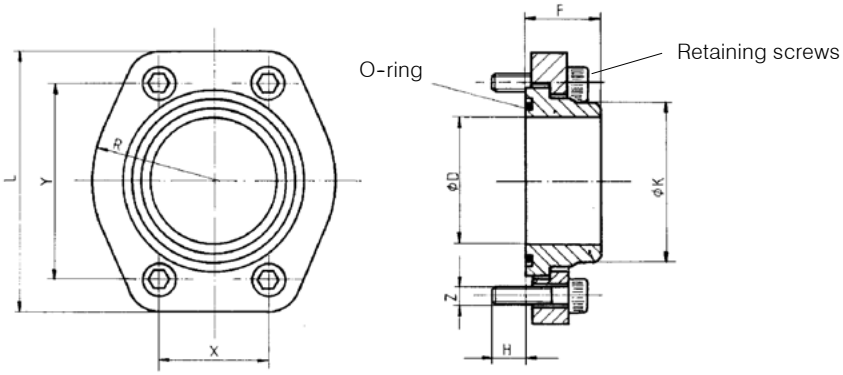

Material: ST37
For Viton seals, contact Bucher Hydraulics

Ordering number	Ordering code	SAE flange Size	D	K	F	H	L	R	X	Y	O-ring 90 Shore 'A'	Retaining screws DIN 912-8.8	Torque Nm	pipe 1) O/dia.approx.
062450	RF 07-S	2 1/2"	63	75	35	14	120	57	51	89	69,44x3,53	M 12x30	70	75
063880	RN 08-S	3"	76	88			140,5	68	62	106,5	85,32x3,53	M 16x30	180	88
063890	RN 09-S	3 1/2"	89	100	40	19	158,5	73	70	120,3	98,02x3,53	M 16x40	180	100
063900	RN 10-S	4"	103	115			168	79	78	130	110,72x3,53	M 16x40	180	115

1) We recommend the use of seamless precision steel tube to DIN 2391 with wallthick. max 6 mm